DLA-30-ACF-60 AC Frequency Meter

3.5 Digit LED Panel Meter



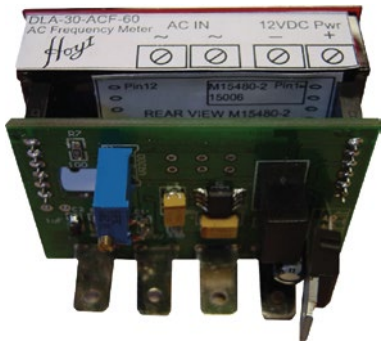

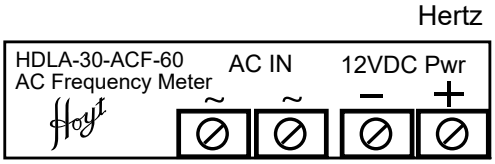

Input: 40 - 90 HZ
120 / 240VAC

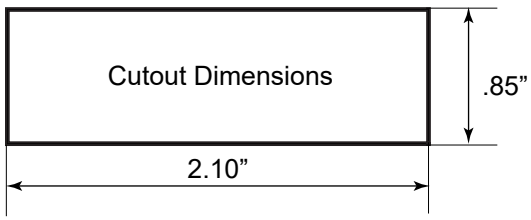

Features

Digital AC Frequency Meter with 3.5 digit red high intensity LED.

Frequency, 50 or 60 Hertz.

Marine – Ideal for ship to shore panels.

Generators – Ideal for generator panels.

Specifications

Display

Numeral size:	0.56" red high Intensity digits with terminal blocks (isolated design).
Polarity:	automatic, "-" displayed.
Overrange:	three lower order digits blank for inputs > 1999 & < -1999.

Performance:

Range:	50 or 60 Hertz.
Auxiliary Power.	12-24 VDC.
Accuracy:	±(0.05% FS + 1 count).
Sample rate:	3 readings per second.
Field adjustable:	single turn potentiometer for calibration.
Warm-up:	10 minutes typical.
Temperature coeff.:	±100 ppm per °C typical.
Power Supply Voltage:	12-24 VDC.

Environment:

Operating temperature: -10 to 50 °C

Storage temperature: -40 to 75 °C.

Connection:

Terminal Block Connections. Spade terminals.

NOTE: manufactured part numbers have changed. DMC-30-ACF-60 has been replaced by HDLA-30-ACF-60.

Hoyt Electrical Instrument Works, Inc.
23 Meter Street
Penacook, NH 03303
Phone: (800) 258-3652
Fax: (603) 753-9592
Email: sales@hoytmeter.com
hoytmeter.com