Features and Benefits



The NEMA 3R Rated EXTRA DUTY® Metallic and Non-metallic While-in-Use Covers offer weather protection for outlets when they are in use.

- Patented keyhole mounting system allows installation in under a minute
- Pre-configured for GFCI with patented technology for alternate devices
- Lockable tab for OSHA compliance
- Sealed-in-place gasket
- High-impact polycarbonate construction provides maximum durability
- Each cover contains three or six adapters to make a variety of configurations (16 or 55)
- Extra Duty rated covers are NEC 406.9(B) compliant

Weather Resistant Recessed Receptacle with While-In Use Cover

Description	Housing Color	Horizontal Mount	Vertical Mount
Weather and tamper-resistant duplex receptacle with clear while-in-use Extra-Duty cover, 15A 125V.	Gray White Brown	RW15300GY RW15300W RW15300BR	RW15400GY RW15400W RW15400BR



RW15400GY



RW15300GY

Non-Metallic While-In-Use Covers

Description	Dimensions Height x Width x Depth	Standard	EXTRA DUTY®
Standard 1-gang cover with clear tinted cover, for horizontal or vertical mounting; 16-in-1 configurations. 1.16	5.90" x 4.18" x 2.75" (149.8 x 106.1 x 69.9)	RW57300	RW58300
Extra deep 1-gang cover with clear tinted cover, for horizontal or vertical mounting; 16-in-1 configurations. 1.16	5.92" x 4.20" x 4.75" (150.4 x 106.7 x 120.7)	RW57350	RW58350
Standard 2-gang cover, clear tinted cover, for vertical mounting only; 55-in-1 configurations. 1.55	5.54" x 5.43" x 2.75" (140.7 x 138.0 x 69.9)	RW57750	RW58750



RW57300



RW58300



RW57350




RW58350




RW57750




RW58750

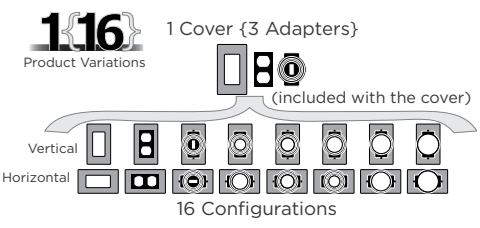


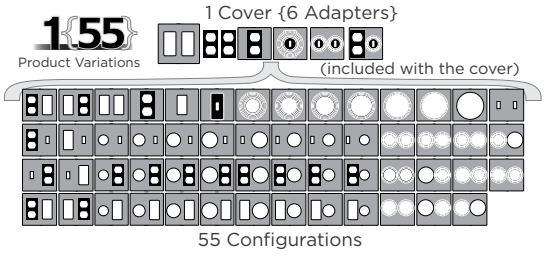


Non-Metallic Cover Dimensions



RW58300



RW58350



RW58750

Dimensions in Inches (mm)